中来股份 JOLYWOOD

NTOPCon Technology

JW-HD144N

N-type Bifacial High Efficiency Mono Silicon Half-Cell Double Glass Module

550-570W

Cell Type



11BB

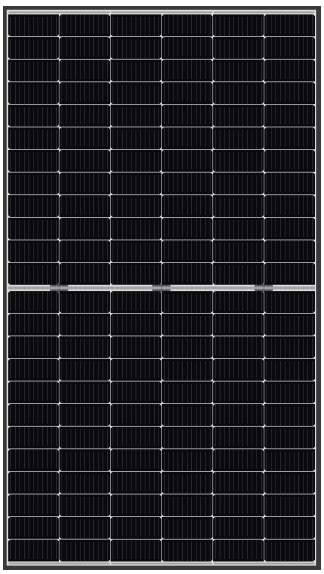

570W
Maximum Power Output

22.00%
Maximum Module Efficiency

0~+5W
Power Output Tolerance

Additional Power Generation Gain
At least 30-year product life, more than 10%- 30% additional power gain comparing with conventional module

Better Weak Illumination Response
Wide spectral response, higher power output evenunder low-light settings like smog or cloudy days

Lower LCOE
High bifaciality, high power output, saving BOS cost

Better Temperature Coefficient
Higher power generation under working conditions, thanks to passivating contact cell technology

Wider Applicability
BIPV,vertical installation, snowfield, high-humid area, windy and dusty area

Jolywood Delivers Reliable Performance Over Time

- Leader of N-type bifacial technology
- Fully automatic facility and world-class technology
- Long term reliability tests passed
- 100% EL tests

Linear Performance Warranty

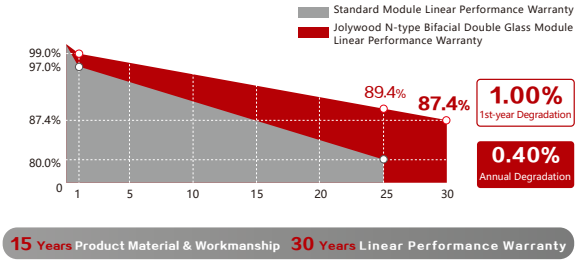

Additional Insurance Backed by Munich Re

"optional" Munich RE

IEC

CE

中来股份 JOLYWOOD

Jolywood (Taizhou) Solar Technology Co., Ltd. , a subsidiary under Jolywood Group (stock code: SZ300393), is the world leading N-type bifacial solar cells and modules manufacturer. The technology of NTOPCon, NIBC, TBC, etc, and the annual N-type bifacial production capacity reaches 2.1GW cells and 3GW modules. With vision of "Cultivator of Green Energy", Jolywood adheres to the road of advanced and high efficiency solar technology industrialization.

S
E
N

JW-HD144N Series | N-type Bifacial High Efficiency Mono Silicon Half-Cell Double Glass Module

Electrical Properties | STC*

Testing Condition	Front Side	Front Side	Front Side	Front Side	Front Side
Peak Power (Pmax) (W)	550	555	560	565	570
MPP Voltage (Vmp) (V)	42.0	42.2	42.4	42.6	42.8
MPP Current (Imp) (A)	13.10	13.16	13.21	13.27	13.32
Open Circuit Voltage (Voc) (V)	50.2	50.4	50.6	50.8	51.0
Short Circuit Current (Isc) (A)	13.87	13.93	13.99	14.05	14.11
Module Efficiency (%)	21.23	21.42	21.61	21.80	22.00

*STC: Irradiance 1000 W/m², Cell Temperature 25°C, AM1.5
The data above is for reference only and the actual data is in accordance with the pratical testing
Power Measurement Tolerance ±3%

Electrical Properties | NOCT*

Testing Condition	Front Side	Front Side	Front Side	Front Side	Front Side
Peak Power (Pmax) (W)	416	420	424	427	431
MPP Voltage (Vmp) (V)	39.4	39.6	39.8	39.9	40.2
MPP Current (Imp) (A)	10.56	10.61	10.65	10.70	10.74
Open Circuit Voltage (Voc) (V)	48.0	48.2	48.4	48.6	48.7
Short Circuit Current (Isc) (A)	11.18	11.23	11.28	11.33	11.38

*NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s

Operating Properties

Operating Temperature (°C)	-40℃~+85℃
Maximum System Voltage (V)	1500V (IEC)
Maximum Series Fuse Rating(A)	30
Power Tolerance	0~+5W
Bifaciality*	75%
Fire class	A

*Bifaciality=Pmaxrear (STC) /Pmaxfront (STC) , Bifaciality tolerance:±5%

Temperature Coefficient

Temperature Coefficient of Pmax*	-0.320%/℃
Temperature Coefficient of Voc	-0.260%/℃
Temperature Coefficient of Isc	+0.046%/℃
Nominal Operating Cell Temperature (NOCT)	42±2℃

*Temperature Coefficient of Pmax±0.03%/℃

Mechanical Properties

Cell Type	182.00mm*91.00mm
Number of Cells	144pcs(12*12)
Dimension	2285mm*1134mm*30mm
Weight	32.5kg
Front /Rear Glass*	2.0mm/2.0mm
Frame	Anodized Aluminium
Junction Box	IP68 (3 diodes)
Length of Cable*	4.0mm², 300mm
Connector	QC Solar QC4.10-cd / Staubli EVO2

*Heat strengthened glass
*Cable length can be customized

With Different Power Generation Gain (regarding 545W as an example)

Power Gain (%)	Peak Power (Pmax) (W)	MPP Voltage (Vmp) (V)	MPP Current (Imp) (A)	Open Circuit Voltage (Voc) (V)	Short Circuit Current (Isc) (A)
10	589	41.8	14.07	50.0	14.90
15	610	41.9	14.59	50.1	15.45
20	632	41.9	15.10	50.1	15.99
25	654	41.9	15.62	50.1	16.54
30	676	41.9	16.13	50.1	17.08

Engineering Drawing (unit: mm)

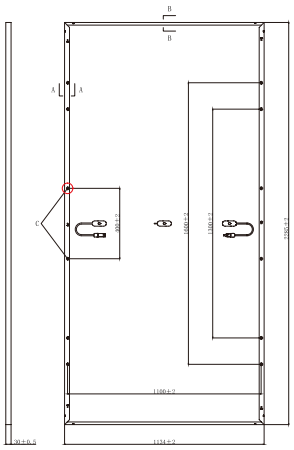



A Long Frame



B Short Frame



C Mounting Hole

Characteristic Curves | HD144N-545



I-V Characteristics
At Different Irradiations



P-V Characteristics
At Different Irradiations



I-V Characteristics
At Different Temperatures

Packaging Configuration

Packing Type	20'GP	40'GP	40'HQ
Piece/Pallet		35	
Pallet/Container	5	10	20
Piece/Container	175	350	700

*The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement,Jolywood (Taizhou) Solar Technology Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

中来股份 JOLYWOOD

Made in China
JOLYWOOD (TAIZHOU) SOLAR TECHNOLOGY CO.,LTD.
Add: No.6 Kaiyang Rd., Jiangyan Economic Development Zone, Taizhou, Jiangsu Province, China, 225500
TEL: +86 523 80612799 **Email:** mkt@jolywood.cn

DOC.#: TZ-MP-419 REV: B